




Gew. 13080136

Anteurecht volgens de Wet oordeelkundig.

Schakelaars in U.K.f.-stand getekend.

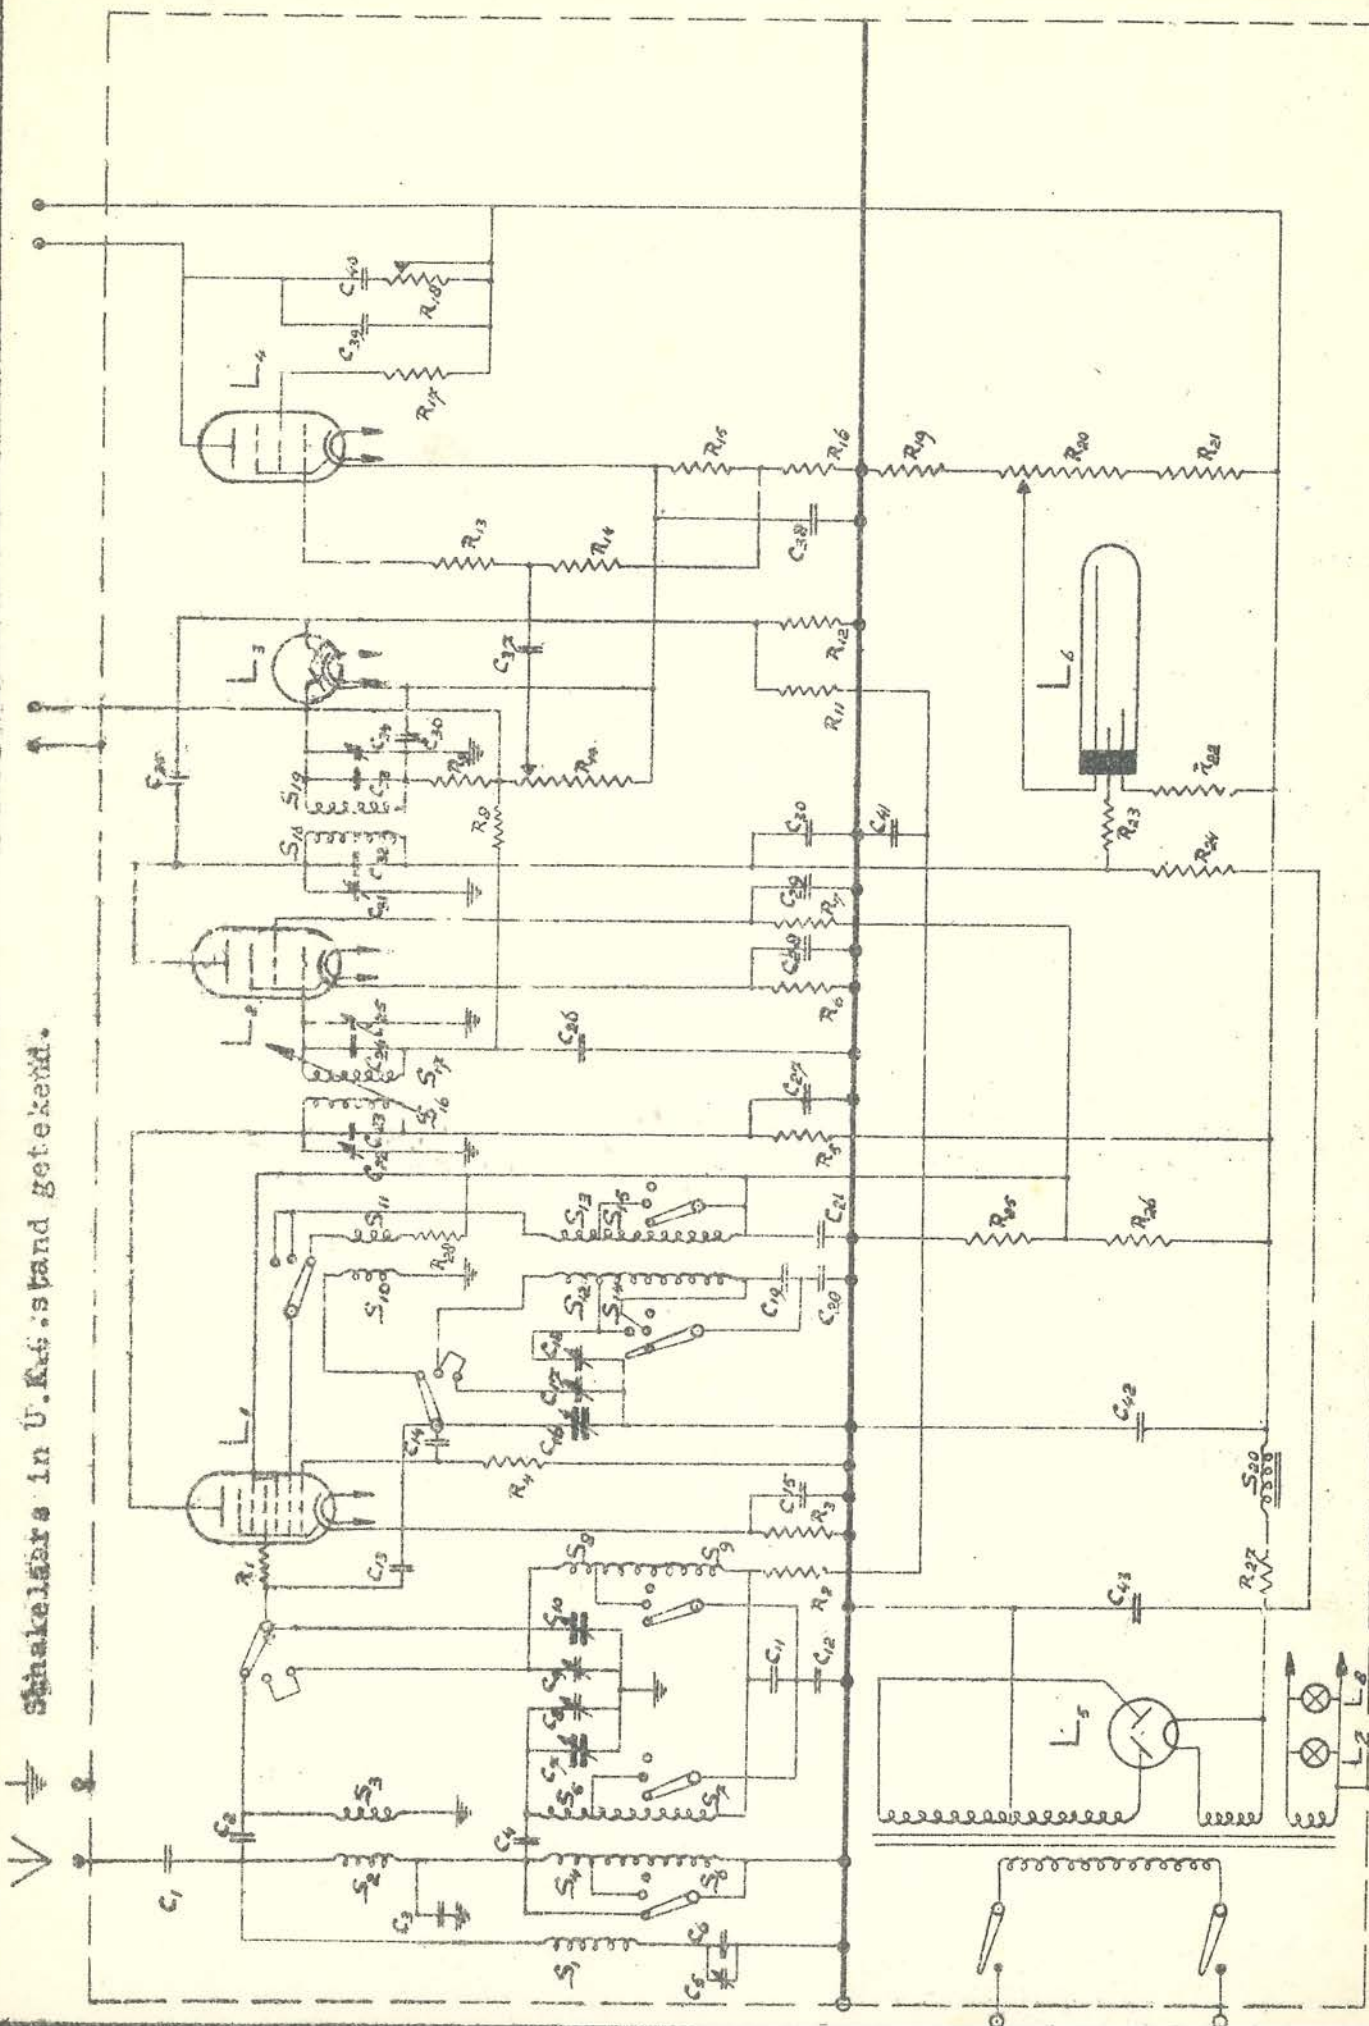





N.V. Radiofabriek en Ingenieursbureau v/h  
**VAN DER HEEM en BLOEMSMA**

Apparaat: **RY 157**  
Onderdeel: **WAARDELIJG ST.**

**SCHEMA.**

No. blad:

Dat: **21-7-'36**

Gew. 16-10.36

Auteursrecht volgens de wet voorbehouden.

C	Capaciteit	Codenummer
1	10000 $\mu$ F	28 193 900
2	10 "	28 190 030
3	80 "	28 192 990
4	10 "	
5	27 "	28 210 690
6	80 "	
7	490 "	28 211 421
8	27 "	
9	27 "	
10	490 "	
11	50000 "	28 199 060
12	25000 "	030
13	2 "	28 205 800
14	500 "	28 190 200
15	50000 "	
16	490 "	
17	27 "	
18	27 "	
19	1000 "	28 193 000
20	2010 "	010
21	50000 "	
22	27 "	
23	80 "	
24	80 "	
25	27 "	
26	50000 "	
27	50000 "	
28	0,1 $\mu$ F	28 199 090
29	0,1 "	
30	50000 $\mu$ F	
31	27 "	
32	80 "	
33	80 "	
34	27 "	
35	10 "	
36	100 "	28 190 130
37	10000 "	
38	25 "	
39	2000 "	28 193 920
40	10000 "	
41	50000 "	
42	16 "	
43	16 "	
44		

R	Weerstand	Codenummer
1	20 $\Omega$	GK 770 41
2	0,2 $\text{M}\Omega$	28 770 480
3	250 $\Omega$	190
4	50000 "	420
5	10000 "	350
6	2000 "	280
7	1000 "	250
8	2 $\text{M}\Omega$	580
9	0,1 "	
10	0,5 "	pot. meter 10g.
11	1 "	28 770 530
12	0,5 "	
13	0,1 "	
14	1,6 "	
15	160 $\Omega$	28 770 370
16	160 "	
17	32 "	100
18	50000 "	pot. meter
19	20000 "	28 770 380
20	20000 "	pot. meter
21	80000 "	1 Watt
22	2 $\text{M}\Omega$	28 770 580
23	1000 $\Omega$	
24	32000 "	28 771 090 1 W
25	2x50000 "	0,0 1
26	3x50000 "	070 1 W
27	5x 5000 "	28 770 970 1 W
28	100 "	28 770 150 0,5 W

S	Windingen	Codenummer
1	930	GK 561 05
2	30	) GK 561 08
3	10,5	
4	170	
5	180	) GK 561 02
6	550	
7	350	) GK 561 03
8	176	
9	350	
10	13	) GK 561 09
11	6	
12	84	) GK 561 04
13	20	
14	244	
15	84	
16	1070	) GK 561 06
17	1070	
18	1070	) GK 561 07
19	1050	
20	3000	28 546 081

**LAMPEN.**

L	
1	= AK 2
2	= AF 3
3	= AB 2
4	= AL 4
5	= AZ 1

Transformator GK 510 29