



N.V. Radiofabriek en Ingenieursbureau v/h
VAN DER HEEM en BLOEM SMA

Apparaat: **KY 158**

Onderdeel:

SCHEMA


No. blad:

Dat: 6-7-'36


1200-136

Auteursrecht volgens de wett. voorbehoeden.

golfl.schak.in U.K.G. stand.
 Gram.schak.in radio stand.



Paraaf:
 VOLTHENIUS

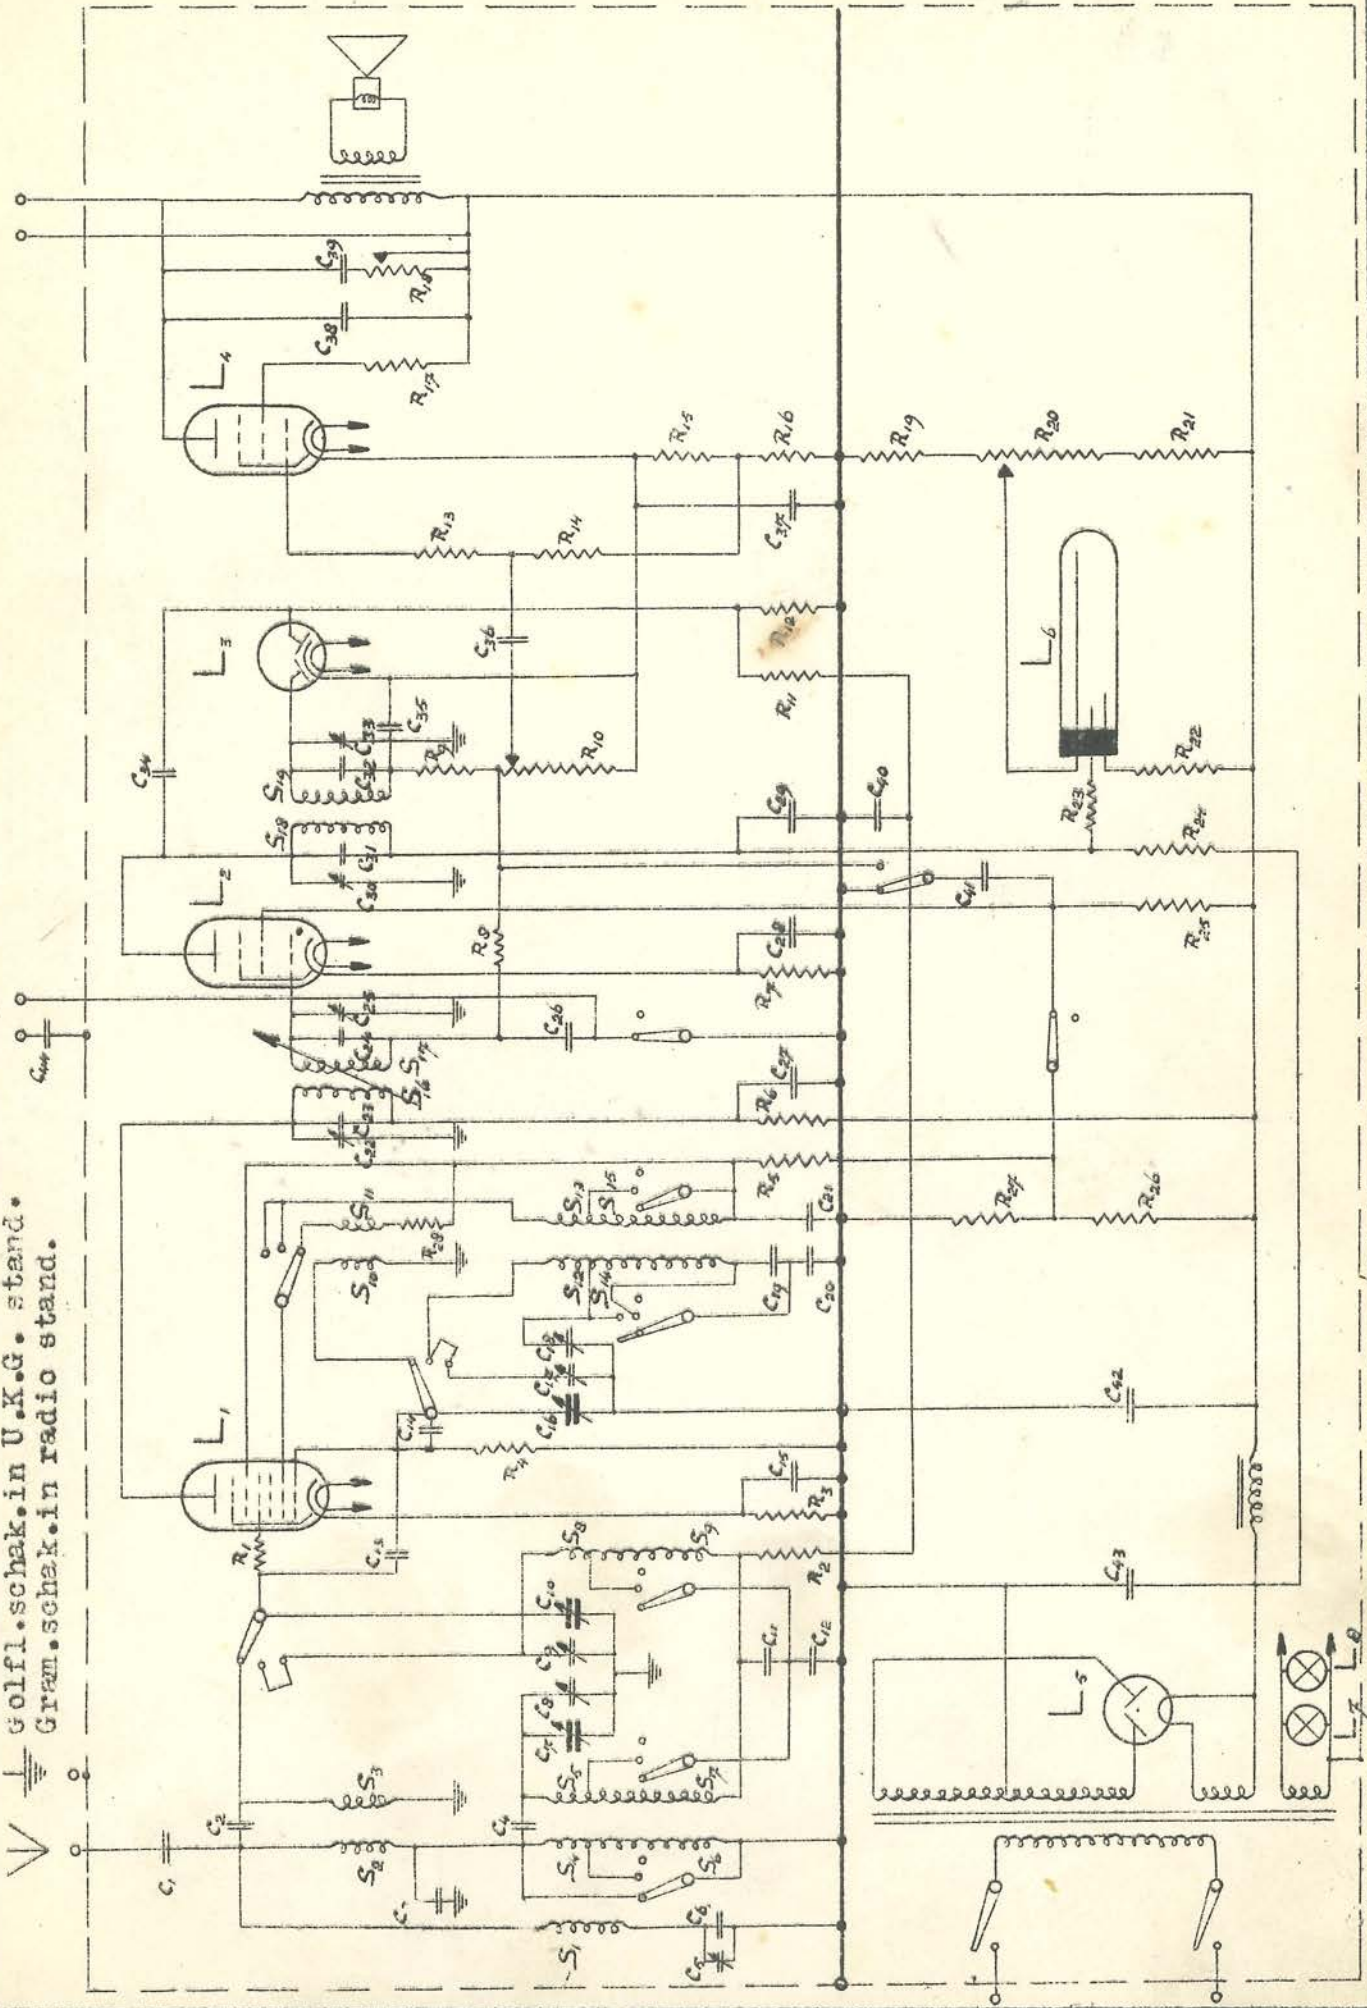



C o n d e n s a t o r e n		
C	Capaciteit	Codenummer
1	10000 ppF	28 198 990
2	10 "	28 190 030
3	80 "	28 192 990
4	10 "	
5	27 "	28 210 690
6	80 "	
7	490 "	28 211 421
8	27 "	
9	27 "	
10	490 "	
11	50000 "	28 199 060
12	25000 "	
13	2 "	28 205 330
14	500 "	28 190 200
15	50000 "	28 199 060
16	490 "	
17	27 "	
18	27 "	
19	1000 "	28 193 000
20	2010 "	010
21	50000 "	
22	27 "	
23	30 "	
24	30 "	
25	27 "	
26	50000 ppF	28 199 060
27	50000 ppF	
28	0,1 pF	
29	50000 ppF	
30	27 "	
31	80 "	
32	80 "	
33	27 "	
34	10 "	
35	100 "	
36	10000 "	
37	25 pF	28 180 020
38	2000 ppF	28 193 920
39	10000 "	
40	50000 "	
41	50000 "	
42	16 pF)	28 181 400
43	16 "	
44	0,1 "	28 199 090

W e e r s t a n d e n		
R	Weerstand	Codenummer
1	20 Ω	GK 770 41
2	0,2 MΩ	28 770 430
3	250 Ω	190
4	50000 "	420
5	4000 "	310
6	10000 "	350
7	2000 "	230
8	2 MΩ	530
9	0,1 "	450
10	0,5 "	28 810 690
11	1 "	28 770 550
12	0,5 "	520
13	0,1 "	450
14	1,6 "	570
15	160 Ω	170
16	160 "	170
17	32 "	100
18	50000 "	28 810 040
19	20000 "	28 770 380
20	20000 "	28 810 880
21	30000 "	28 771 090 1 W.
22	2 MΩ	
23	1000 Ω	28 770 250
24	32000 "	28 771 050
25	0,1 MΩ	
26	3x50000 Ω	28 771 070 1 W.
27	2x50000 "	070 1 W.
28	100 Ω	28 770 150 0,5 W

S P O E L E N.		
S	Windingen	Codenummer
1	930	GK 561 05
2	30)	GK 561 08
3	10,5)	
4	170)	
5	180)	GK 561 02
6	550)	
7	350)	
8	176)	GK 561 03
9	350)	
10	13)	GK 561 09
11	6)	
12	84)	
13	20)	GK 561 04
14	244)	
15	84)	
16	1070)	GK 561 06
17	1070)	
18	1070)	GK 561 07
19	1050)	

LAMPEN

- 1 = AK 2
- 2 = AF 3
- 3 = AB 2
- 4 = AL 4
- 5 = AZ 1

Luidspreker GK 860 05
 Transformator GK 510 29

Gew. 16-10-136

Auteursrecht volgens de wet voorbehouden.