


C	1 1/2m14	18	08 16 17 20 19	66	21 1/2m28	30	31 29	32 1/2m37	67	28 1/2m44	65 45 1/2m50	58	64 63 62	51 52 53	01 56 55 56 157 06	60
R	1 1/2m12	12 1/2m38	3 4 5	19 1/2m22	4	30 31 29	32 1/2m37	67	7 1/2m11	12 1/2m17	36 35 37	34 18 19 23 1/2m30	20 21 22 21 31 38 39 31 32			
S	50									30 1/2m35						36 1/2m49

KV 536
KV 537

FIG. 1

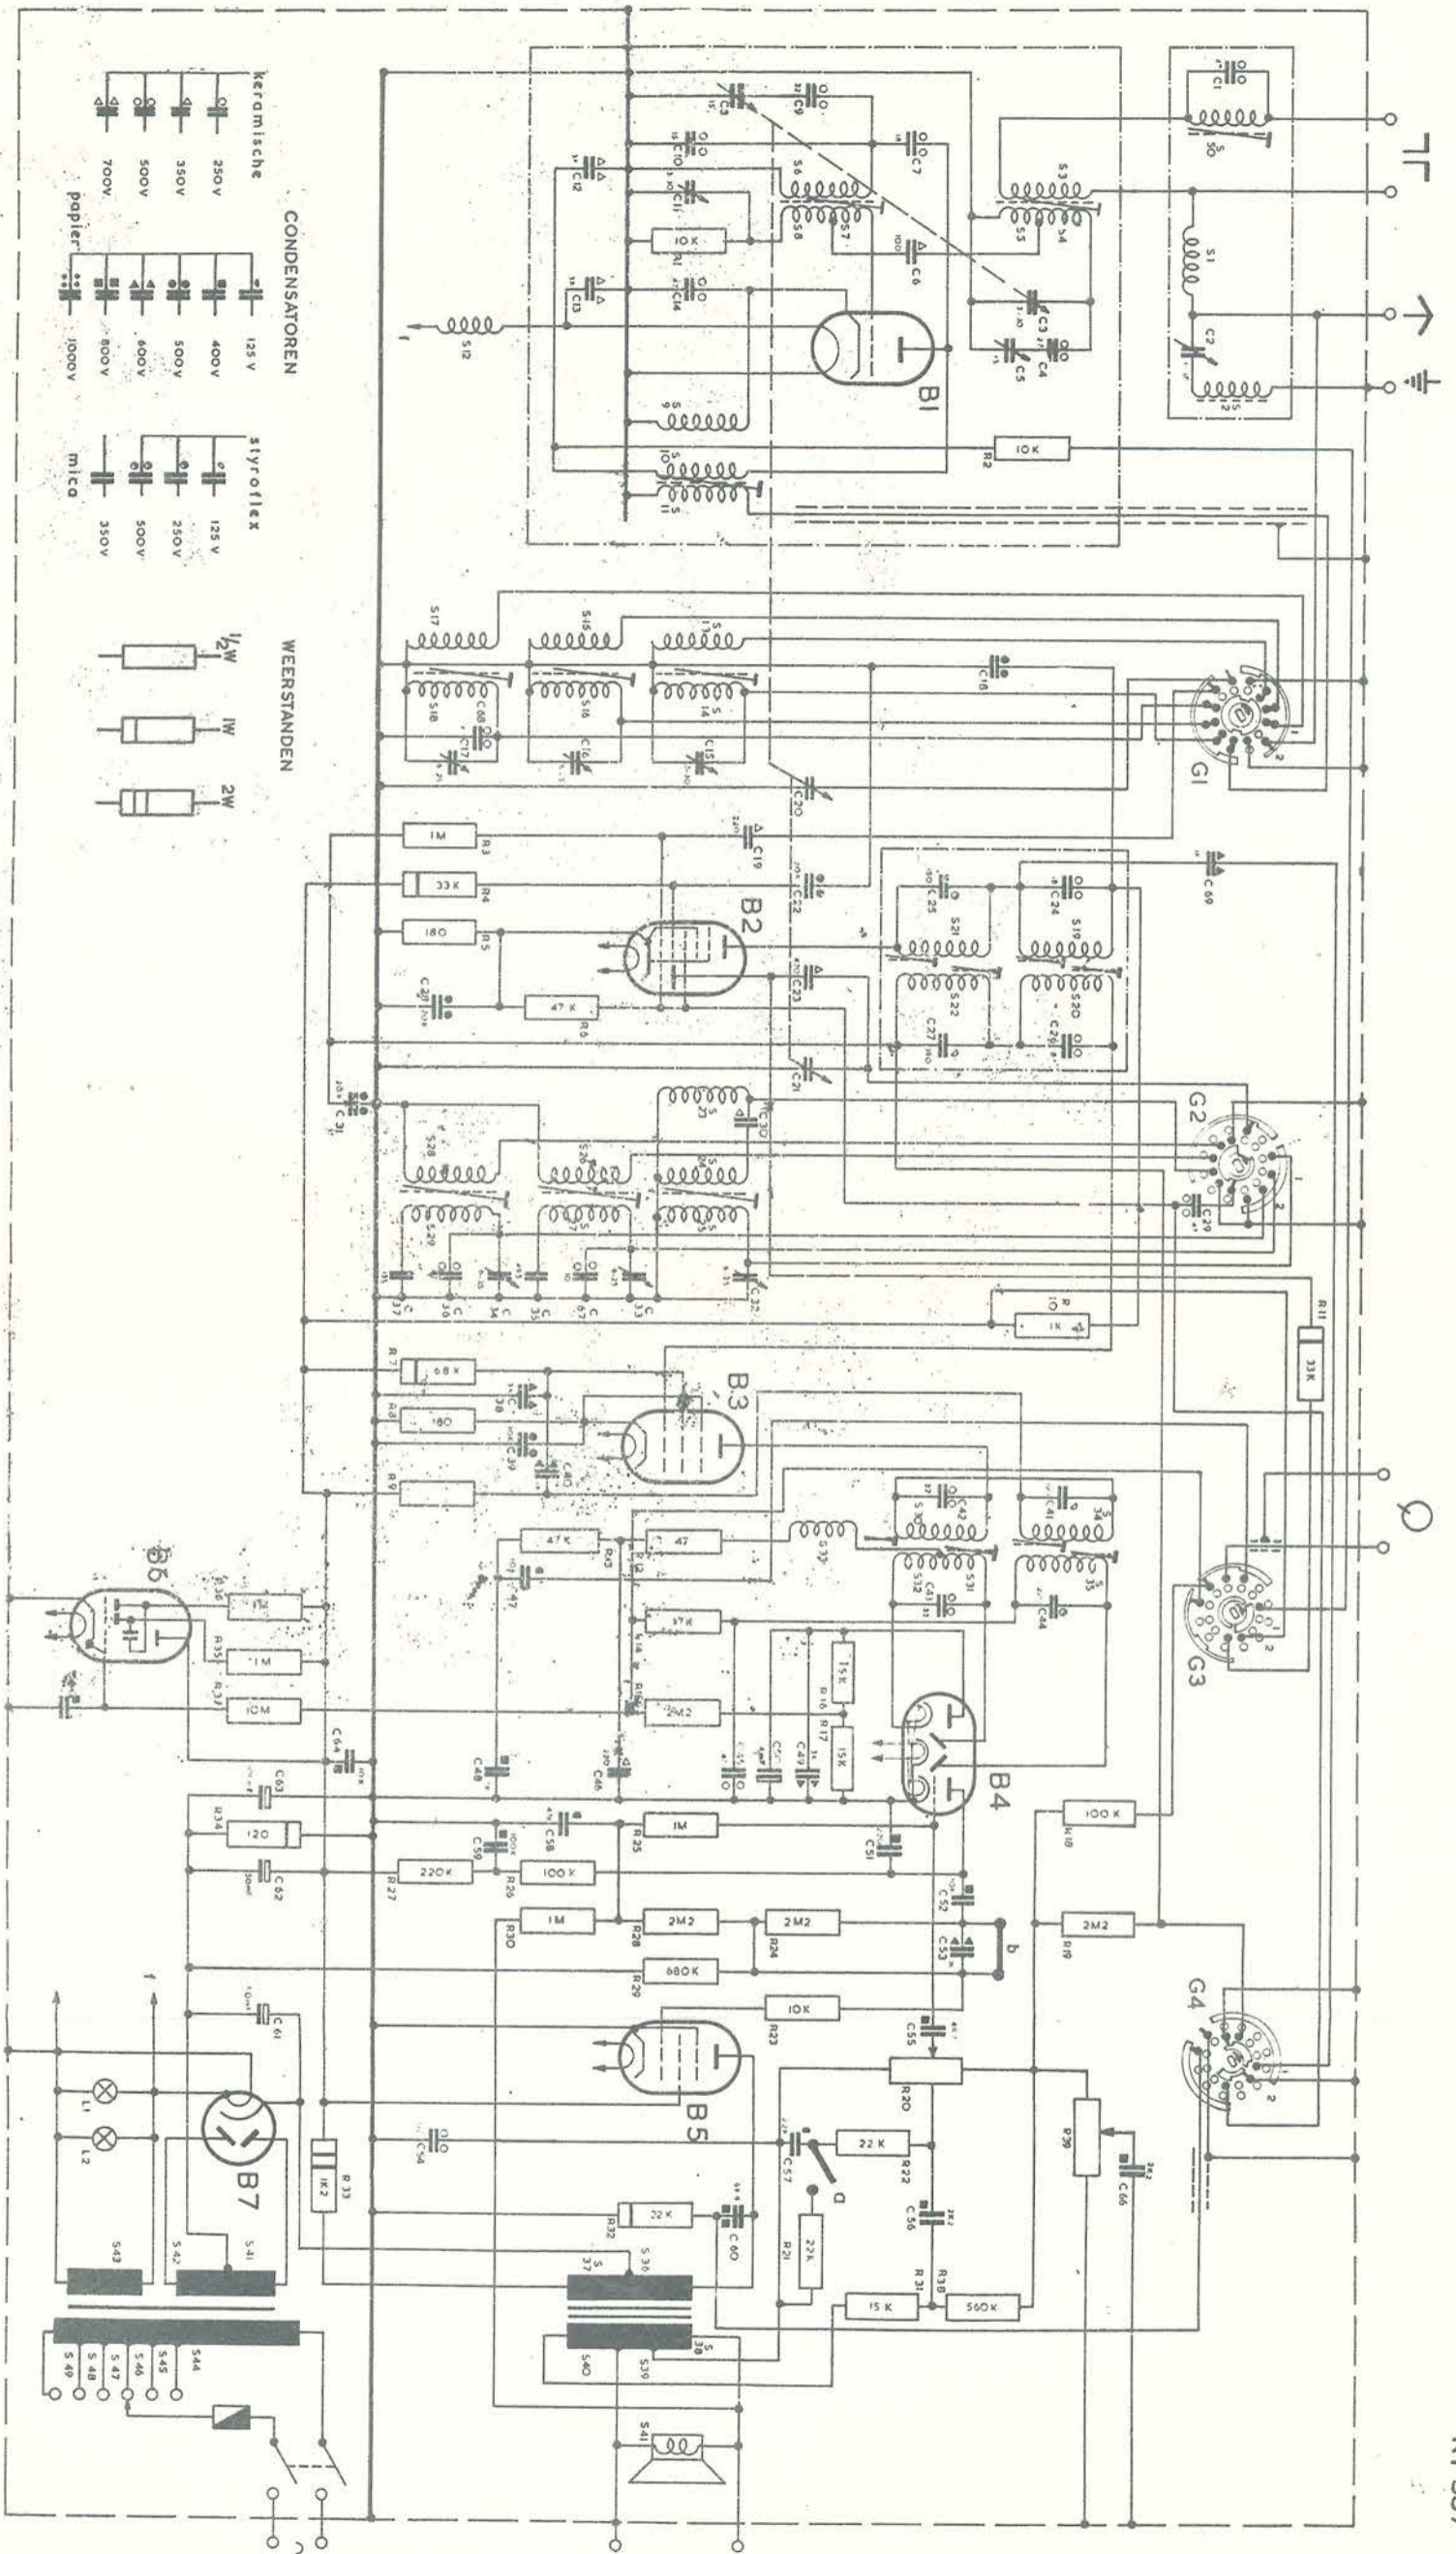

- CONDENSATOREN**
- keramische: 125 V, 250 V, 350 V, 500 V, 700 V
 - styroliëx: 125 V, 250 V, 500 V
 - popier: 1000 V
- WEERSTANDEN**
- 1/2W, 1W, 2W

GOLFLENGETE SCHAKELAAR 5 STANDEN
FM KG MG LG GRAM.
GETEKEND IN STAND FM

BASSCHAKELAAR : STAND NORMAAL
IN STAND SPRAAK IS CONTACT „a“
GESLOTEN EN CONTACT „b“ GEOPEND

