



94  
 Freq. in Mc/s  
 max.  
 min.

MAT.		BEHAND.		FORMAAT A. 2		LAATSTE WJZ.	
Schema KY 364U-431U		Opgev.	25	0.5	SCHAAL	EUROP. PROJ.	1 12-2-54
KY 364U-01-KY 431U-01		Voorbew.	25.0	0.05	MATEN IN mm.		2 5-7-54
		Nahew.	25.00	0.02	CODE N.		3 12-8-54
		Glabew.	25.00	0.02			4 16-9-54
VAN DER HEEM N.V. - DEN HAAG - HOLLAND		GEY		DAT. 22-9-'53			



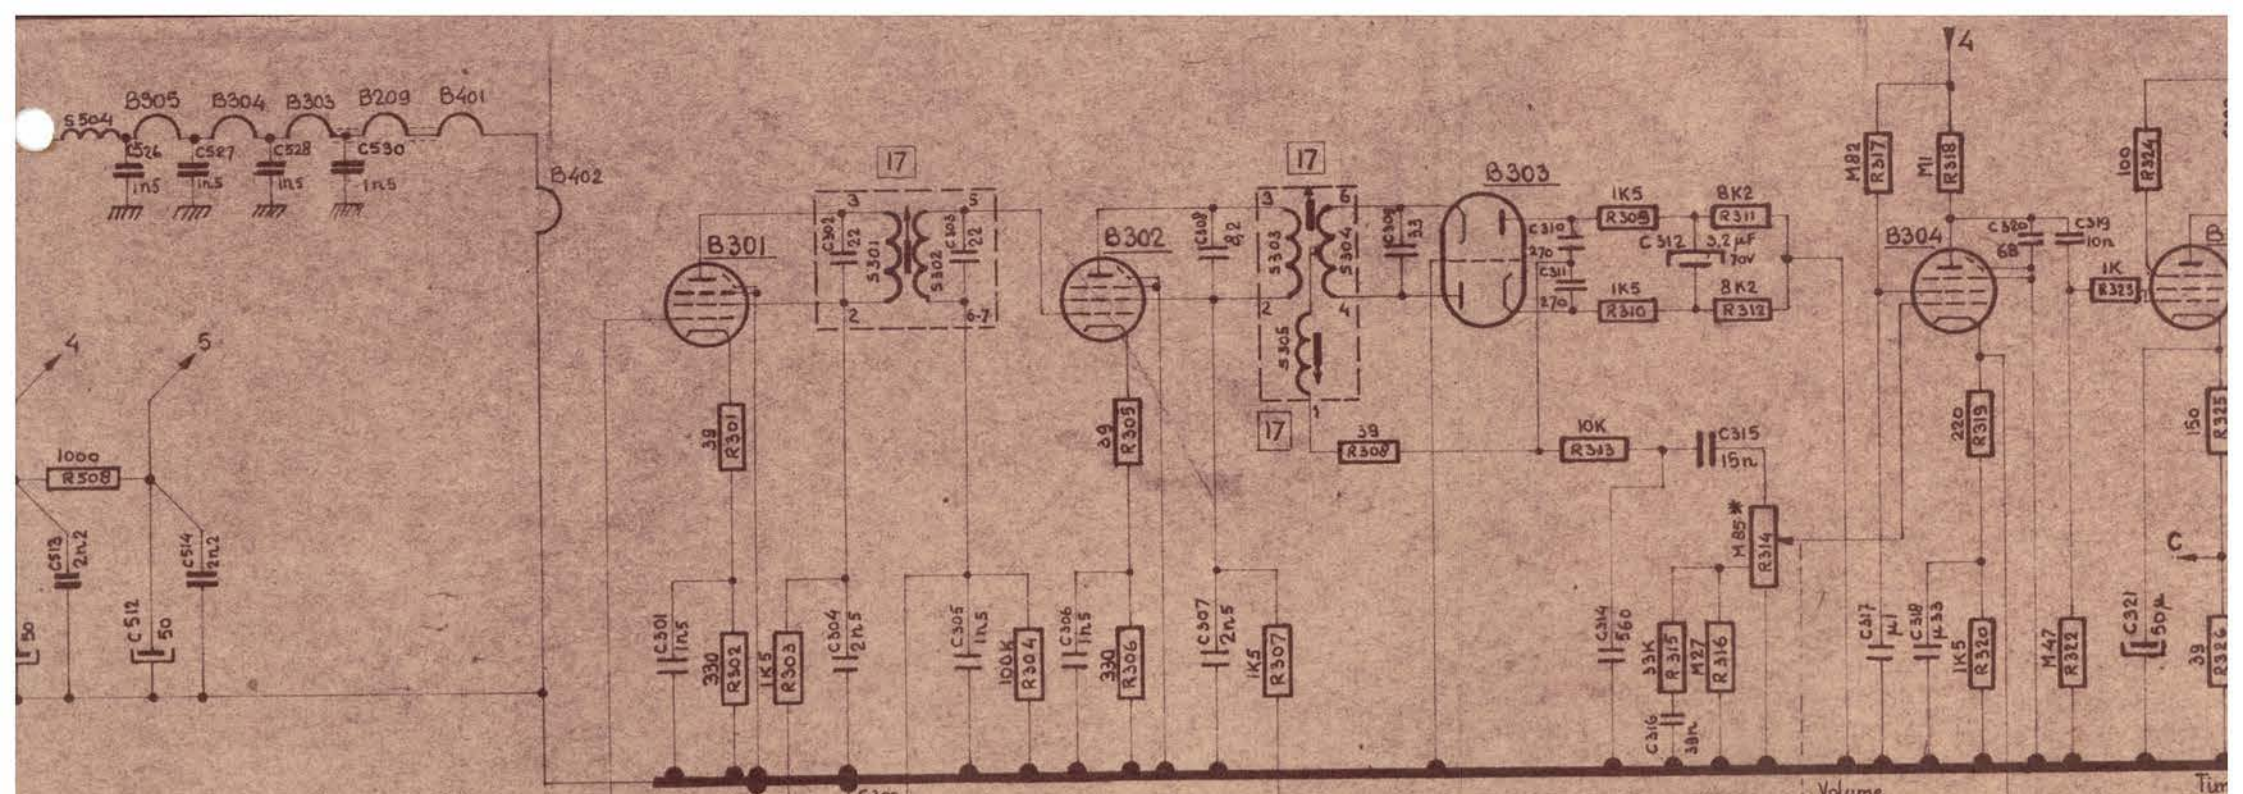


\* Bij KY431U en KY431U-O1  
R314 = 50 + 450K

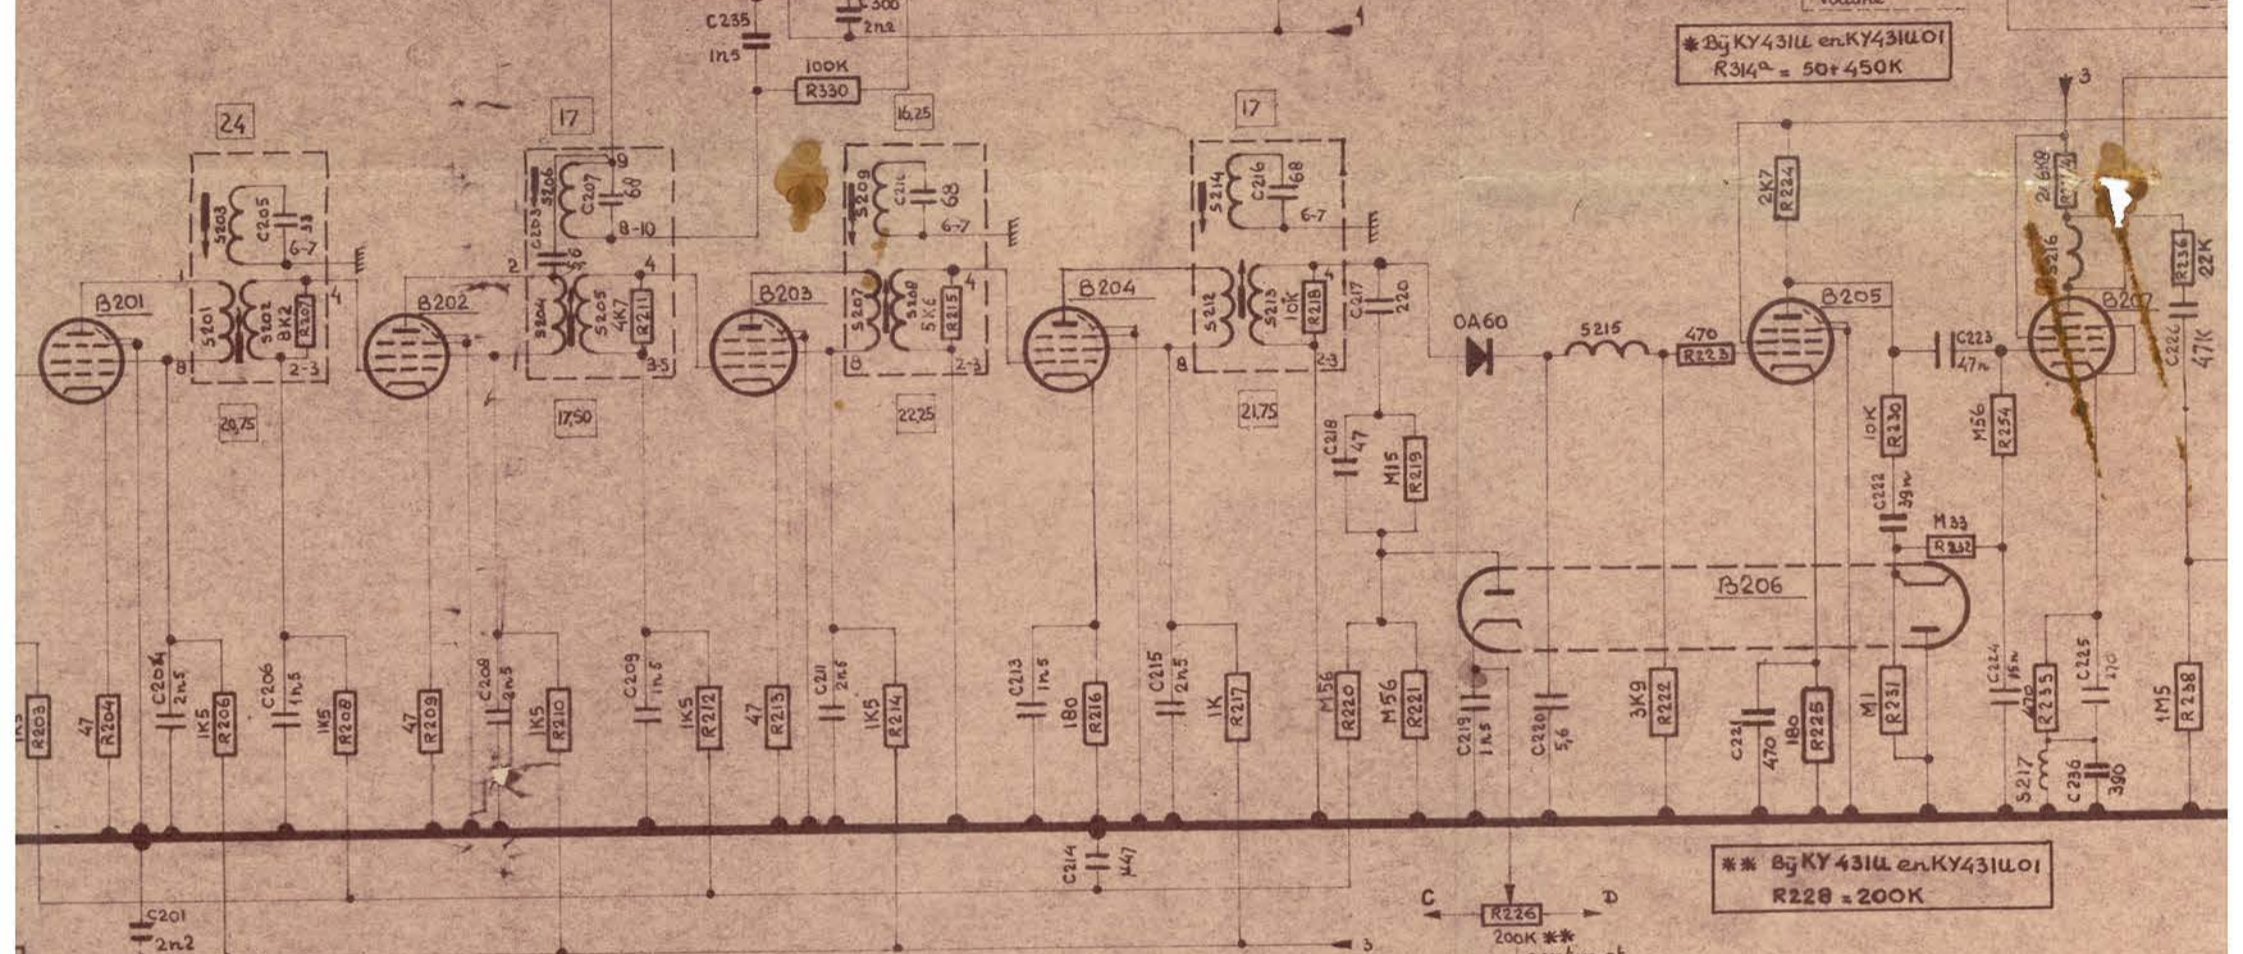


\*\* Bij KY431U en KY431U-O1  
R228 = 200K

contrast

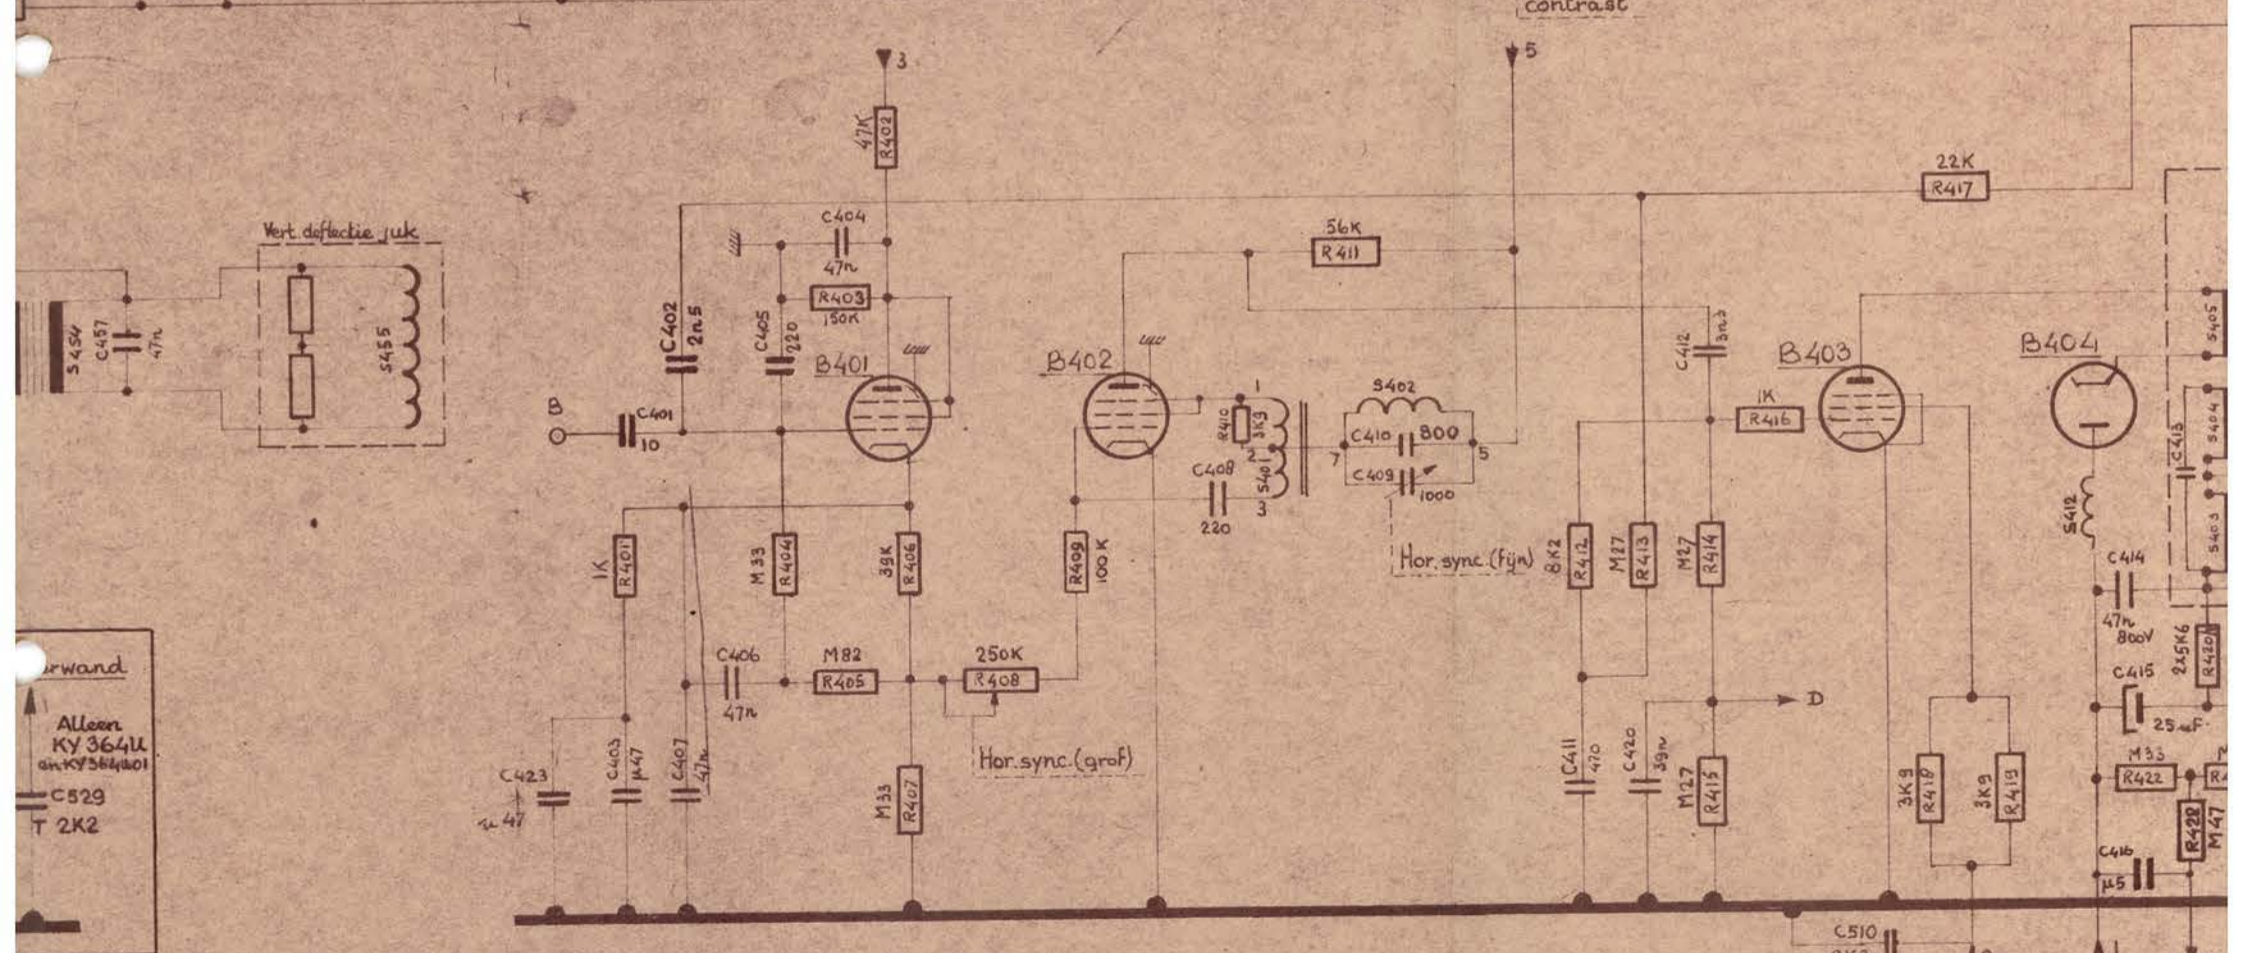

Alleen KY364U en KY564U-O1  
C529  
T 2K2

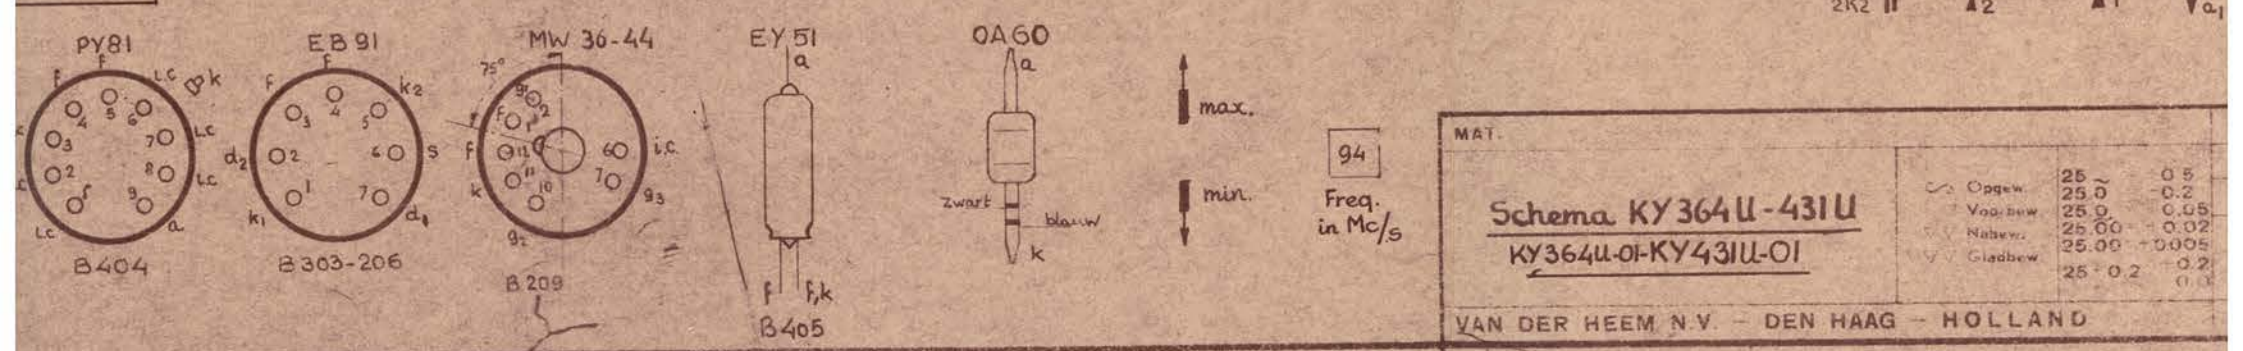

MAT.	
Opgev.	25 ~ 0.5
Voorbew.	25.0 ~ 0.25
Nabew.	25.00 ~ 0.02
Glabew.	25.00 ~ 0.005
	25.02 ~ 0.2
	( )

VAN DER HEEM N.V. - DEN HAAG - HOLLAND